

JOB _____ ITEM # _____ QTY # _____



MODEL NO. F20-M
(Mobile)



MODEL NO. F21-S
(Stationary)

- ◆ Cold Wall Units
- ◆ Coils Wrap Around Unit

SPECIFICATIONS

Models F20-M and F21-M refrigerated dispensers for packaged ice cream, mobile or stationary.

FRAME AND BODY

The frame is constructed of all welded heavy gauge stainless steel. The exterior sides are 18 ga. stainless steel and the top is 16 ga. stainless steel. The interior liner is all welded 20 ga. stainless steel, watertight and fitted with a 1/2" I.P.S. chrome plated bronze drain trap at the bottom. The liner is separated from the top by full perimeter breaker strips. All models are equipped with removable stainless steel plug type insulated covers with perimeter gaskets and handles. (See Optional Items for hinged covers).

MECHANICAL REFRIGERATION

The cabinet is refrigerated to maintain a temperature of 0°F to -10°F, by means of a self-contained evaporative system composed of a built-in four-wall, copper refrigerant coil which is connected to 120V, single phase, fan cooled, hermetically sealed condensing unit. The condensing unit is 1/3 H.P., 5.9 amp for model F20-M and 1/3 H.P., 7.3 amp for model F21-M. The system is a thermostatic expansion valve type with pressure control. The condensing unit is housed within the cabinet with slotted access panels for ventilation. A 6' long three wire cord set with a NEMA 5-15P plug is provided.

MODEL NUMBER

- F20-M (Mobile)
- F21-S (Stationary)

DISPENSING MECHANISM

The cabinet is fitted with one or more removable self-leveling dispensers with stainless steel coil springs and ball bearing guides designed to keep the carrier level at all times. Adjustment of the dispensing height for varying weights is accomplished by engaging or disengaging individual springs. Both models include aluminum trays which function as separators for layers of ice cream.


FEET, CASTERS AND BUMPERS

Stationary models are mounted on 6" high x 1-1/4" O.D. adjustable stainless steel bullet feet. Mobile models are mounted on 4" diameter extra heavy duty, double ball bearing swivel casters with non-marking rubber tires.


OPTIONAL ITEMS

- ◆ **PIZZAZZ POWDER COATING IN LIEU OF STAINLESS STEEL.**
- ◆ (-V) 12" vertical bumpers. (Add 1" to length and width.)
- ◆ (-AT) Additional aluminum trays, 10" x 20" or 20" x 20".
- ◆ (-TL) Tubular locking device for the covers.
- ◆ (-Y4) Polyurethane 4" casters, 2 with brakes.
- ◆ (-Y5) Polyurethane 5" casters, 2 with brakes.
- ◆ (-WR) Chrome wire racks.
- ◆ (-B) Corner Bumpers
- ◆ (-PB) Full Perimeter Bumper

DIMENSIONS AND CAPACITY



Model F20-M

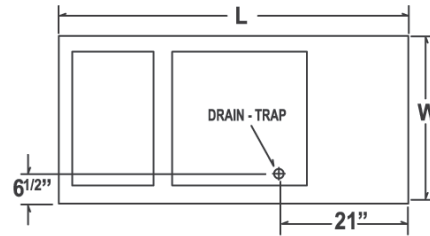

Model F21-M

Model no.	Capacity in Cartons*	Aluminum Trays	Cabinet Size**			Ship weight	H.P.	Amps@ 120v
			L	W	H			
. F20-M	to 576	13-20x20	42-1/2	29-1/4	31	400	1/3	5.9
. F21-M	to 864	13-20x20 & 13-10x20	59	29-1/4	31	460	1/3	7.3

*Capacity is for 3 ounce cartons 3" diameter, 1-3/4" high.

**On mobile units add 1" to cabinet length and width for corner bumpers (optional); 1" for vertical bumpers (optional); 2" for wrap-around bumpers (optional).

For overall height add 6" for standard bullet feet; add 5" for standard casters.

A-8 SPEC

PIPER PRODUCTS
BUILT TO LAST
www.piperonline.net

300 S. 84th Avenue
 Wausau, WI 54401
 Phone: 800-544-3057
 Fax: 715-842-3125

LIMITED WARRANTY: PIPER PRODUCTS warrants to the original purchaser parts and labor for a period of twelve (12) months from the date of purchase. See manufacturer's complete warranty for details.

It is our policy to build equipment which is design certified by companies that have been accredited at the Federal Level by the Occupational Safety and Health Agency (OSHA) and ANSI as a National Recognized Testing Laboratory. These companies include CSA International, Underwriters Laboratories, and the National Sanitation Foundation. However, a continuing program of product improvement makes it necessary to submit new models to the agencies as they are developed. Consequently, all models may not bear the appropriate labels at all times.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Information is not for design purposes.