



ACR-15

**AIR CURTAIN TYPE, MOBILE OR STATIONARY**

The model ACR-15 refrigerated cabinet offers refrigerated storage and service for a variety of foods. The fully self-contained refrigeration system provides a cold air curtain which allows for extended operation with the front door open, while maintaining food temperature and safety. Bulk foods, in pans or on trays, are conveniently stored on the provided removable tray slides.

**FRAME**

The frame is constructed of stainless steel, fully welded for rigidity and for proper support of the components. The base is formed to provide a rigid mounting surface for the casters.

**LINER**

The cabinet liner is constructed of stainless steel, welded together and sealed to prevent leakage. It is fitted at the bottom with a drain, leading to an electric condensate evaporator mounted in the refrigeration compartment. The liner is mounted to the frame, with breaker strips where needed to avoid condensation.

**EXTERIOR**

The exterior is constructed of all welded stainless steel. Stainless steel ventilation louvers are mounted on all four sides of the refrigeration compartment. The front louver is removable for service. The cabinet is fully insulated. Stainless steel grip handles are mounted on the rear of the cabinet.

**DOOR**

The front door is double panel, constructed of all welded stainless steel and fully insulated. It is mounted to the cabinet with heavy duty stainless steel hinges which allow the door to swing 270°. The standard door hinge is on the right. The door has a full perimeter gasket and a heavy duty pull handle. A heavy duty edge mounted door latch is provided with provisions for padlocking available.

**LIMITED WARRANTY:** PIPER PRODUCTS warrants to the original purchaser parts and labor for a period of twelve (12) months from the date of purchase. See manufacturer's complete warranty for details.

It is our policy to build equipment which is design certified by companies that have been accredited at the Federal Level by the Occupational Safety and Health Agency (OSHA) and ANSI as a National Recognized Testing Laboratory. These companies include CSA International, Underwriters Laboratories, and the National Sanitation Foundation. However, a continuing program of product improvement makes it necessary to submit new models to the agencies as they are developed. Consequently, all models may not bear the appropriate labels at all times.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Information is not for design purposes.

JOB \_\_\_\_\_ ITEM # \_\_\_\_\_ QTY # \_\_\_\_\_

**MODEL NUMBER**

ACR-15

**TRAY SLIDES**

The provided fifteen pairs of tray slides are mounted on two lift-off frames, one for each side. The frames may be easily removed for cleaning. The slides are mounted on 3" centers and incorporate a no-tip feature. The capacity is (15) 18" x 26" sheet pans; or (30) 14" x 18" trays; or (30) 12" x 20" 2-1/2" food pans.

**REFRIGERATION SYSTEM**

Re-circulating air is chilled as it passes through an evaporator/blower unit. The air then passes through ductwork designed to ensure full coverage of the food and to provide the efficient front air curtain. Cooling of the air is provided by a 3/4 H.P., 208 volt, single phase, fan cooled hermetic condensing unit mounted at the bottom of the cabinet. A hot gas defrost system, including a condensate evaporator, is included. A microprocessor control monitors the entire system. It includes an LED display which is mounted on the front of the unit along with a lighted main power switch. Total amperage, including the condensate evaporator, is 8.0 Amps. The 5' long supply cord is fitted with a NEMA 6-15P plug. The cord exits from the rear of the cabinet and a cord hook is provided. The coolant is environmentally safe type R-404A.


**CASTERS**

The unit is mounted on four 5" diameter, heavy duty, swivel casters. Includes a set of 4 corner bumpers.

**PERFORMANCE**

Pull down time from 80°F ambient to 41°F inside the cabinet in 30 minutes or less. The air screen technology will maintain the food at 41°F with the door open for up to two hours.

SHIPPING WEIGHT:  
525 Lbs.

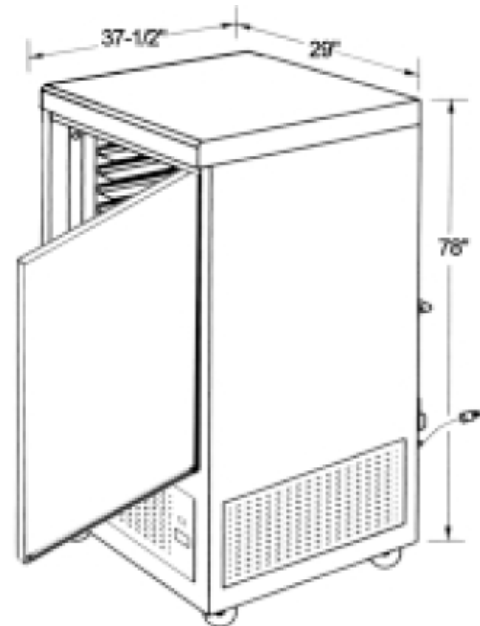

**OPTIONS**

Part #	Description
<input type="checkbox"/> MRCE	Mechanical refrigeration compressor extended warranty
<input type="checkbox"/> B	Corner bumper

**SPEC F-6**

**PIPER PRODUCTS**  
BUILT TO LAST  
[www.piperonline.net](http://www.piperonline.net)

300 S. 84th Avenue  
Wausau, WI 54401  
Phone: 800-544-3057  
Fax: 715-842-3125