

Angle Rack

Aluminum



PIPER'S SUPERIOR

FOUNDATION

Featured on our toughest racks: Two 12 gauge aluminized steel reinforcing channels support our .090" thick aluminum bottom panel. The edges are formed and rolled to create a built-in bumper and plate casters make this the strongest foundation in the industry.

Piper Angle Racks are designed for in-house foodservice facilities, bakeries, restaurants and high-activity operations handling trayed product.

Our fully welded frame and 1/2" aluminum tie bar avoids distortion and gives greater side-to-side strength. Add that to our unique Piper-engineered base and casters and you have the finest Angle Rack in the industry.

TIE BARS AND CONTINUOUS WELD

- ◆ 1/2" extruded aluminum tie bar keeps rack square
- ◆ Adds rigidity and stability to rack
- ◆ Two tie bars per unit
- Weld along entire edge of glides
- ◆ No gaps to promote bacterial growth
- Solid Bottom Standard

JOB_____ ITEM # ____ QTY # ____

MODEL NUMBER

- **♦** 612
- ▶ R611
- **6**20
- ◆ R618
- **♦** 630
- ◆ R626

DIMENSIONS

- ♦ 612 21" x 27" x 67-1/8"
- ◆ 620 21" x 27" x 67-1/8"
- ♦ 630 21" x 27" x 67-1/8"
- ◆ R611 21" x 27" x 64-3/4"
- ◆ R618 21" x 27" x 64-3/4"
- ◆ R626 21" x 27" x 64-3/4"

SOLID BOTTOM

- Rolled edge acts as bumper
- ◆ 12 gauge reinforcing caster channel eliminates twisting
- ◆ Fully welded corners
- Greatly enhances rack strength
- ◆ .090" thick aluminum

SUPERIOR CORNER SUPPORTS

- ◆ .190" thick gussets provide superior strength
- ◆ Extruded 3-sided channel support
- ◆ All sides fully welded

HEAVY-DUTY CASTERS

- Plate casters for added rigidity and stability
- ◆ 5" x 1-1/4" sealed wheels
- ◆ Delrin bearing, each with 350 lbs. capacity
- Maximum resistance to chemicals, acids, bases, alcohol, water and steam
- Maximum low temperature flexibility for superior performance, even in freezing temperatures


WARRANTY


 One year parts and labor. Warranty is detailed on inside front cover of the price list.

SPEC 1-2



PIPER RACKS

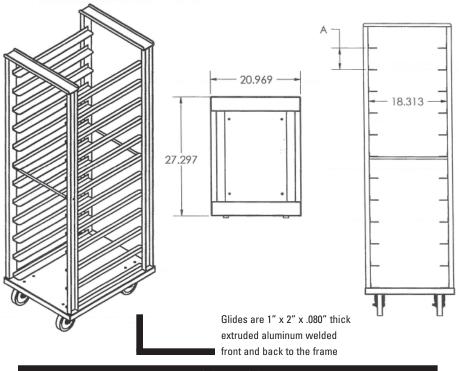



| Model# | Length | Width | (B) Height | (A) Channel Spacing (in.) | Pan Capacity* | Shipping Wt. (lbs) |
|--------|--------|-------|---------------|------------------------------|------------------|-----------------------|
| 612 | 27" | 21" | 67-1/8" | 5 | 12 | 85 |
| 620 | 27" | 21" | 67-1/8" | 3 | 20 | 100 |
| 630 | 27" | 21" | 67-1/8" | 2 | 30 | 125 |
| R611 | 27" | 21" | 64-3/4" | 5 | 11 | 75 |
| R618 | 27" | 21" | 64-3/4" | 3 | 18 | 90 |
| R626 | 27" | 21" | 64-3/4" | 2 | 26 | 100 |

R is roll-in height.

*Rack capacities are for 18" x 26" sheet pans Height includes casters.

Custom height sizes and glide spacing available.

Typical freight class: 250

RACKS OPTIONS / ACCESSORIES PART NUMBER

(Part Number add after model number)

| Option | Description |
|--------|---|
| PS | Pan Stop |
| EMB | Personalized Embossment (12 letters per line) |
| FL | Floor Lock |
| PH | Push Handle |
| Y5 | 5" Polyurethane Casters (set of 4) |

| Option | Description |
|--------|--|
| В | Non-Marking Rubber Bumpers - Corner (set of 4) |
| РВ | Non-Marking Rubber Bumpers - Full Perimeter |
| WB | Wheel Brakes (set of 2) |
| 5x2 | Heavy-duty Casters (set of 4) |
| ٧ | Vertical Bumpers |

I-2 SPEC



300 S. 84th Avenue Wausau, WI 54401 Phone: 800-544-3057 Fax: 715-842-3125 LIMITED WARRANTY: PIPER PRODUCTS warrants to the original purchaser parts and labor for a period of twelve (12) months from the date of purchase. See manufacturer's complete warranty for details.

It is our policy to build equipment which is design certified by companies that have been accredited at the Federal Level by the Occupational Safety and Health Agency (OSHA) and ANSI as a National Recognized Testing Laboratory. These companies include CSA International, Underwriters Laboratories, and the National Sanitation Foundation. However, a continuing program of product improvement makes it necessary to submit new models to the agencies as they are developed. Consequently, all models may not bear the appropriate labels at all times.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Information is not for design purposes.